


**RACW-2450.000-A**

**Specifications**

Parameters	Value	Unit
Frequency Range	2400.000 ~ 2500.000	MHz
Gain, typ	1.48	dBi
VSWR, max	2.0	-
Polarization	Linear	-
Azimuth Beamwidth	Omni-Directional	-
Impedance	50	$\Omega$
Rated Power, max	3	W
Input Power, max (for 5 min)	5	W
Operating Temperature Range	-40 ~ +85	$^{\circ}\text{C}$

**Dimensions**

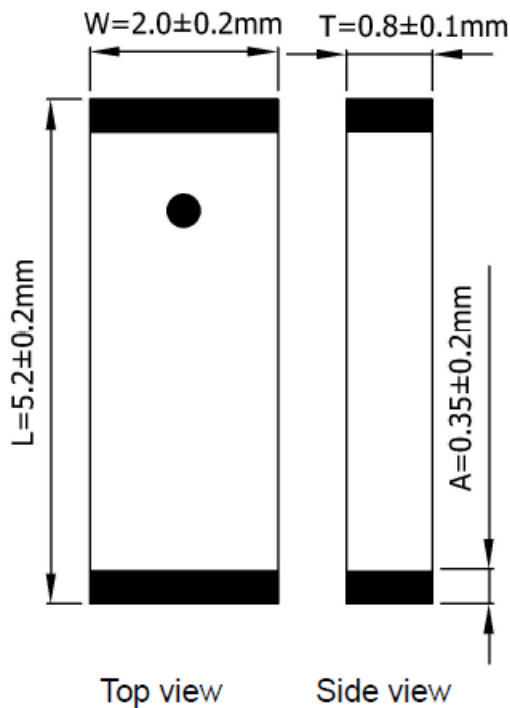

Symbol	Dimension (mm)
L	$5.20 \pm 0.20$
W	$2.00 \pm 0.20$
T	$0.80 \pm 0.10$
A	$0.35 \pm 0.20$

**APPROVAL**

DRAWN BY	KW, 09/04/2019
APPROVED BY	AR
REVISION	A, Initial Release