


**Electrical Specifications**

Parameters	Value	Unit
Center Frequency	868	MHz
Frequency Range	853 ~ 883	MHz
Wave Length	½ Wave	-
Gain	2.5	dBi
VSWR, max	2.0	-
Radiation	Omni-directional	-
Polarization	Vertical	-
Lighting Protection	DC-Grounded	-
Input Power, max	50	W
Impedance	50	Ω
Connector	SMA Male	-
Operating Temperature Range	-40 ~ +85	°C
Weight	15	g
Radome Material	TPE	-
Center Frequency	868	MHz



**Dimensions**

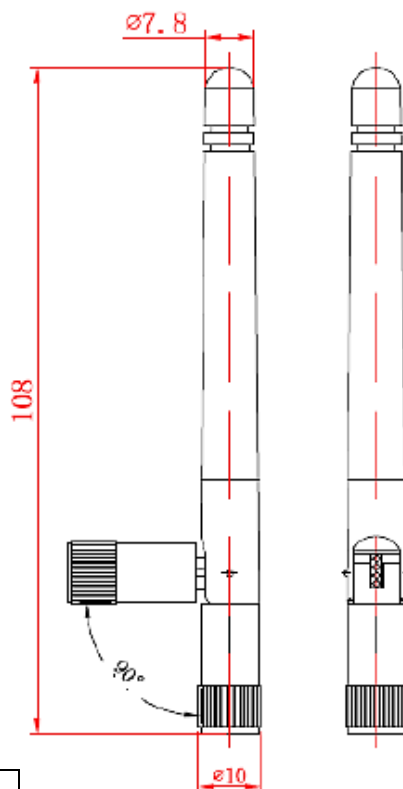

Unit: mm

**APPROVAL**

DRAWN BY	AR, August 20, 2019
APPROVED BY	CP, August 20, 2019
REVISION	A, Initial Release