


RATW-2450-1M-A

Electrical Specifications

Parameters		Value	Unit
Frequency Range		2300 ~ 2600	MHz
Nominal Impedance		50	Ω
VSWR, max		2.0	-
Return Loss		-10	dB
Gain, max		2.1	dBi
Power, max		1.0	W
Polarization		Vertical	
Radiation		Omni-directional	-
Rated Wind Velocity		60	m/s
Connector		RPSMA Male	-
Cable	Type	L195, RG58 Low Loss	-
	Length	1.8	m
	Materials	PVC, Red Copper, PE	-
	Overmold Material	TPEE	-
Mounting SR		PVC	-
IP Rating		IP67	-

Dimensions

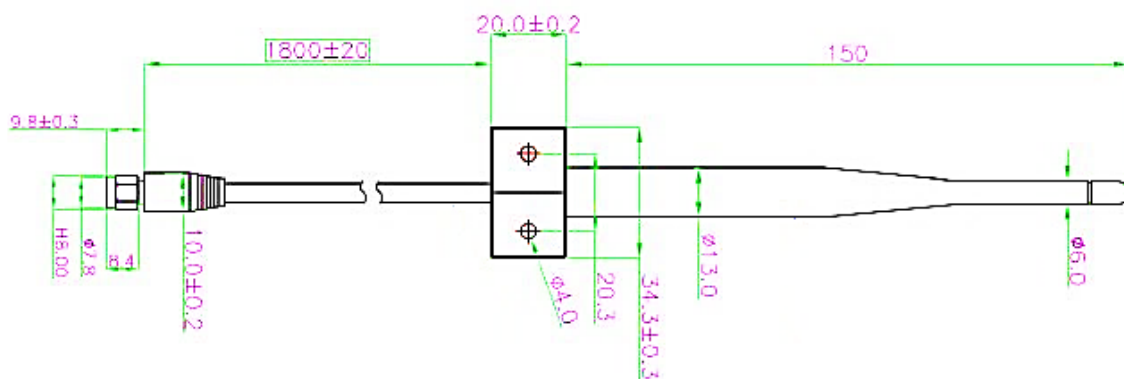

Unit: mm

RATW-2450-1M-A**• APPROVAL**

DRAWN BY	AR, August 20, 2019
APPROVED BY	CP, August 20, 2019
REVISION	A, Initial Release