


RCPW-2450-O-A

Specifications

Parameters		Value	Unit
Frequency Range		2400 ~ 2500	MHz
Return Loss		-10	dB
Peak Gain		4.51	dB
VSWR, max		2	-
Impedance		50	Ω
Radiation		Omni-Directional	-
Polarization		Linear-Vertical	-
Operating Temperature Range		-20 ~ +65	$^{\circ}\text{C}$
Cable	Coaxial	$\varnothing 1.13$	mm
	Color	Black	-
Antenna		FR4	-
	T	0.6	mm
Double Tape		3M9888T	-
Connector		IPEX (Ni/Gold)	-

Dimensions

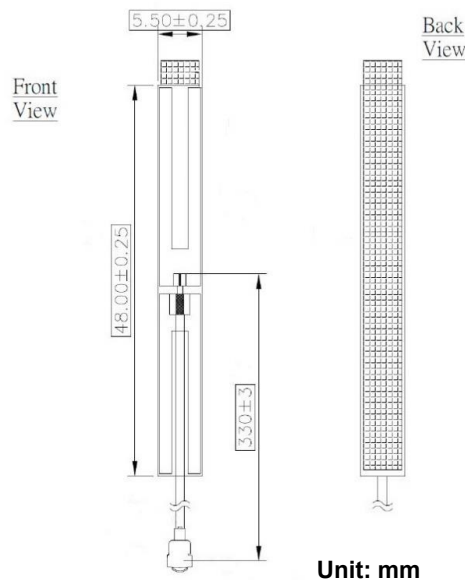

APPROVAL

DRAWN BY	KW, 09/05/2019
APPROVED BY	AR
REVISION	A, Initial Release