
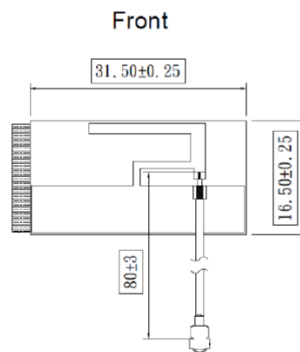


RPCW-2450-O-B


Specifications

Parameters		Value	Unit
Frequency Range		2400 ~ 2500	MHz
Returns Loss		-10	dB
Peak Gain	@ Ant 1	2.69	dBi
VSWR, max		2	-
Polarization		Linear Vertical	-
Radiation Pattern		Directional	-
Impedance		50	$\Omega$
Operating Temperature Range		-20 ~ +65	$^{\circ}\text{C}$
Cable	Type	$\text{\O}1.13$	mm
	Color	Black	-
PCB	Single Layer	FR4	-
	T	0.4	mm
Connector		IPEX Compatible (Gold)	-
Double Tape		3M9888T	-

Dimensions



Back



APPROVAL

DRAWN BY	KW, 09/05/2019
APPROVED BY	AR
REVISION	A, Initial Release