


A		C		D		E	
REV. A		DESCRIPTION FIRST RELEASED		ECN NO. -		NAME Jo	
						DATE 23-JAN-2014	

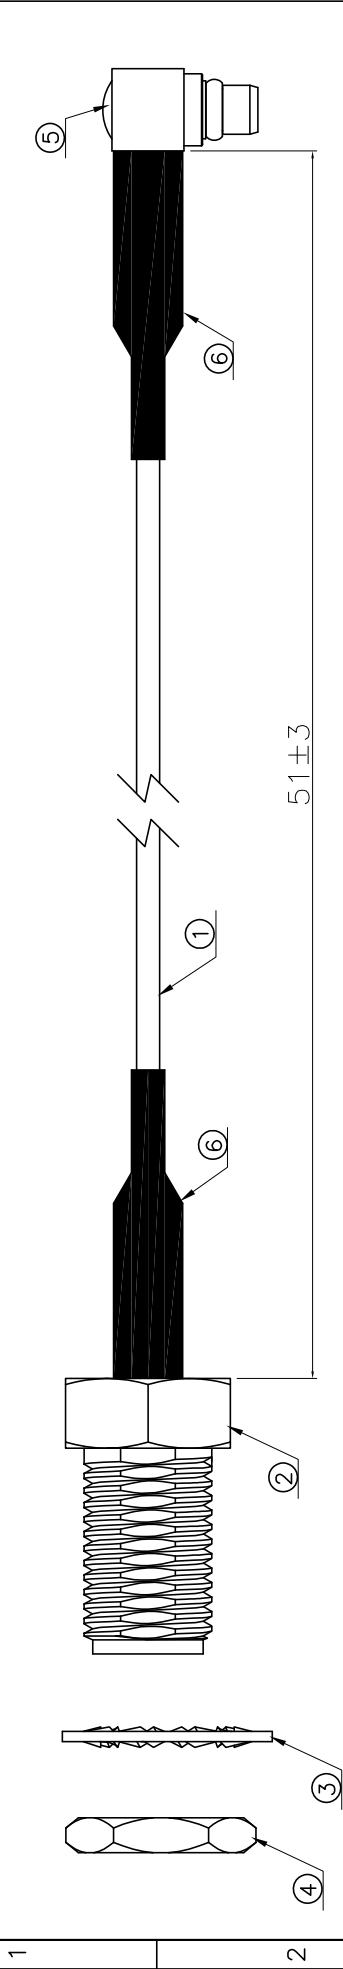

51±3

- ELECTRICAL PROPERTIES :
1. IMPEDANCE : 50 ohms.
  2. FREQUENCY RANGE : 0~3 GHz.
  3. WORKING VOLTAGE : 170 Vrms Maximum.
  4. DIELECTRIC WITHSTANDING VOLTAGE : 500 Vrms Minimum.
- NOTES:  
1. THIS COMPONENT AND ITS HOMOGENEOUS SUB COMPONENTS ARE RoHS COMPLIANT.

⑥	TUBE	HEAT SHRINKING TUBE COLOR: BLACK.	2PCS
⑤	CONNECTOR	MMCX R/A PLUG GOLD PLATED.	1PCS
④	NUT	NUT GOLD PLATED.	1PCS
③	WSHER	WSHER GOLD PLATED.	1PCS
②	CONNECTOR	SMA ST.JACK GOLD PLATED.	1PCS
①	CABLE	OD: 1.13mm COAXIAL CABLE, COLOR: BLACK.	1PCS
NO.	ITEM.	DESCRIPTION	QTY.

TITLE: CABLE SMA ST. JACK TO MMCX R/A PLUG COLOR: BLACK OD:1.13mm L=51mm		DRAWN: Jo	
DWG. NO.: <b>RT-CB3-01050007</b>		CHECKED: MILO	
UNIT: mm		APPROVED: PETER	
DWG SIZE: A4	SCALE: none	SHEET: 1 OF 1	

**RANODA  
TECHNOLOGY**

REVISIONS