


D		E		
REV.	DESCRIPTION	ECN NO.	NAME	DATE
A	FIRST RELEASED	-	Jo	14-MAR-2014

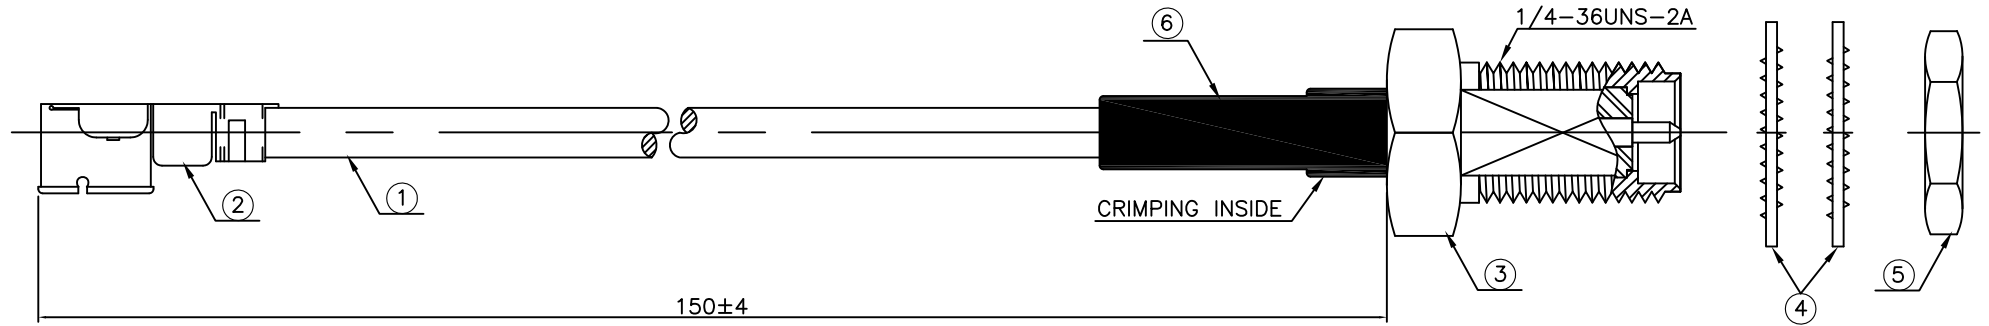

ELECTRONIC TEST:

1. 100% OPEN/SHORT AND MISS WIRE TEST.
2. IMPEDANCE : 50 Ω.
3. FREQUENCY RANGE : 0~3 GHz.
4. WORKING VOLTAGE : AC60V MAX.
5. DIELECTRIC WITHSTANDING VOLTAGE : AC200V MAX.
6. INSULATION RESISTANCE: 500MΩ MIN.

NOTES:

1. THIS COMPONENT AND ITS HOMOGENEOUS SUB COMPONENTS ARE RoHS COMPLIANT.

⑥	TUBE	TUBE COLOR: BLACK.	1PCS
⑤	NUT	NUT CONTACT: GOLD PLATING.	1PCS
④	LOCK WASHER	LOCK WASHER CONTACT: GOLD PLATING.	2PCS
③	CONNECTOR	RP-SMA ST. JACK CONNECTOR CONTACT: GOLD PLATING.	1PCS
②	CONNECTOR	I-PEX CONNECTOR CONTACT: GOLD PLATING, INSULATION COLOR: BLACK.	1PCS
①	CABLE	COAXIAL CABLE, OD: 1.13mm, COLOR: BLACK.	1PCS
NO.	ITEM.	DESCRIPTION	QTY.

DIM.	TOL.
X.	± 0.50
X.X	± 0.35
X.XX	± -
X.XXX	± -
ANGL	± 3°

TITLE: CABLE I-PEX CONNECTOR TO RP-SMA ST. JACK OD: 1.13mm COLOR: BLACK L=150mm

DWG. NO.: **RT-CB4-01050008**

DRAWN: Jo


CHECKED: DAVID

APPROVED: PETER

RANODA TECHNOLOGY

RFQ NO.:

Material



UNIT: mm	DWG SIZE: A4	SCALE: none	SHEET: 1 OF 1
----------	--------------	-------------	---------------